


BLR2 A PLUS

BLUELINE DIGITAL

AUDIO OVER IP

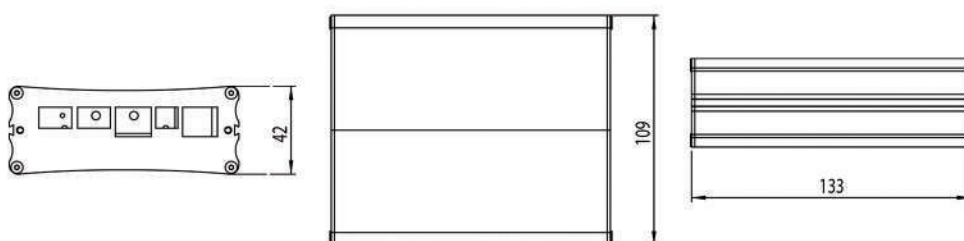

DESCRIPCIÓN

BLR2 A PLUS es un receptor de audio de 1 canal estéreo desbalanceado y 2 salidas amplificadas. Incorpora 2 entradas y 2 salidas TTL de propósito general. Dadas sus características modulares puede ser ubicado en cualquier lugar de la instalación. Para ello cuenta con diferentes elementos de fijación. Puede ser alimentado tanto a través de PoE como de su entrada auxiliar de 12/24V DC.

CARACTERÍSTICAS

- BLR2 A PLUS es un receptor IP estéreo de 1 canal y 2 salidas amplificadas.
- Puede ser alimentado con 12/24V DC o mediante PoE.
- Puede ser configurado vía Web Server.
- Control OSC.
- Permite configurar diferentes parámetros a través de los botones y el display frontal: IP estática, Fuente y Volumen Master. Permite visualizar la IP dinámica y la MAC.
- Puerto Ethernet para conexión a red y PoE.
- Puerto "Remote" para la conexión a mando de control externo (BLC 1).
- Detección automática del tipo de encoding (MP3, PCM).
- 2 salidas amplificadas: 2x5W (PoE) y 2x15W (fuente alimentación externa).
- En modo Bridge 30W @ 8 Ω alimentado a 24V.
- 2 GPI (TTL 3V) y 2 GPO (Open Collector).
- Carga mínima 4 Ohm.
- Sensibilidad -1.15 dBu (680mVrms).

DESCRIPTION

BLR2 A PLUS is a 1 stereo channel unbalanced audio and 2 amplified outputs receiver. It built-in 2 inputs and 2 outputs TTL for general purposes. Due to its modular features it can be placed anywhere of the installation. For that, it has different fixing elements. It can be powered either through PoE or with an external 12/24 V DC power supply.

FEATURES

- BLR2 A PLUS is a 1 channel stereo and 2 amplified outputs IP receiver.
- It can be powered by 12/24V or through PoE.
- It can be configured via Web Server.
- OSC control
- It allows to configure different parameters through the frontal buttons and the display: Static IP, Source and Master volume. It allows to visualize the Dynamic IP and the MAC.
- Ethernet port for network connection and PoE.
- "Remote" port to connect an external controller (BLC 1).
- Automatic detection of MP3 encoding and PCM.
- 2 amplified outputs: 2x5W (PoE) and 2x15W (external power supply).
- Bridge mode 30W @ 8 Ω powered at 24V.
- 2 GPI (TTL 3V) and 2 GPO (Open Collector).
- Minimum load 4 Ohm.
- Output sensitivity -1.15 dBu (680mVrms).