



WORK PRO

WAC 4

QUICK STARTING GUIDE

v.1.0



QUICK STATING GUIDE

NOTE: The purpose of this guide is to show the first steps to configure the device in its most basic parameters and to understand its operation.

Taking into account the wide variety of applications to launch from WAC 4, on our website, in the product section, you can find different guides specific to the particular control application and how to configure the WAC 4 device for its management.


MOUNTING AND CONNECTING

WAC 4 It comes with an electrical box and the necessary hardware for wall mounting. Once mounted, it can be powered.


WC 4 is powered via PoE (through the RJ45 connector), or AC 110 - 220V through the terminals.



Once the unit is powered up, this welcome screen appears. After a few seconds, the configuration symbol is displayed in the lower right corner.

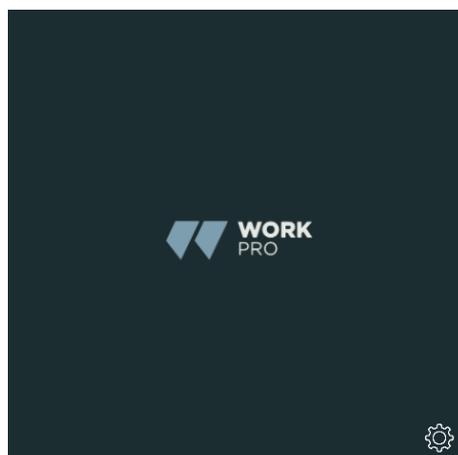


Press to access the main screen for device settings, communication networks, etc.

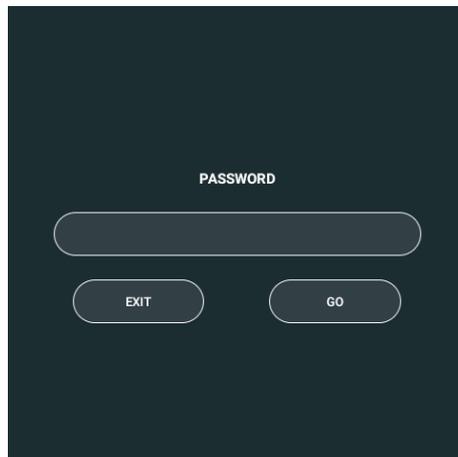


The next screen allows you to enter the password for full access. Remember that the default password is **123456**. We recommend that the first operation you perform with the device is to change the password.

Enter the password and press GO to confirm. Next, the MENU screen will appear with the main functions:

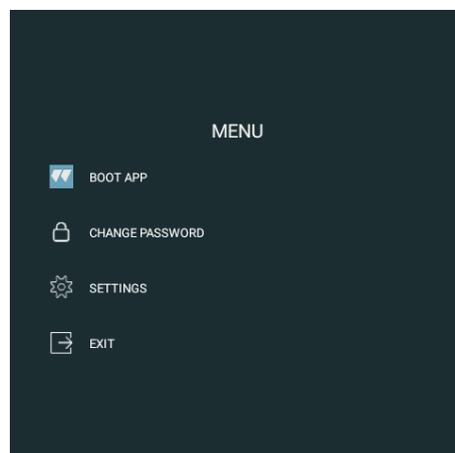


BOOT APP: Allows you to select the application to be triggered when the unit is restarted. Click on the line to access the set of applications and select the one required at that moment.

Among this selection you can find WORKPRO product control software (Integra UI, WorkCAD3, Launcher), as well as audio players such as Spotify or 4STREAM. The application that is currently preloaded is displayed next to the name.

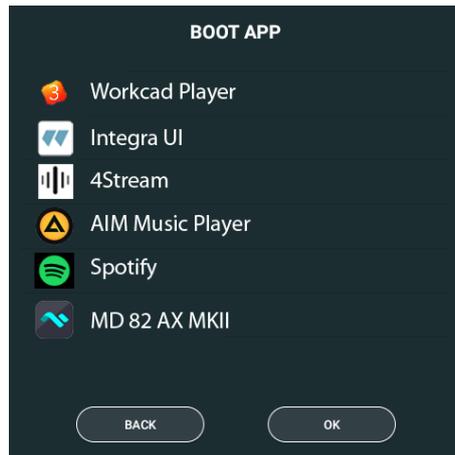


Once selected, return to the MENU screen.


CHANGE PASSWORD: Allows you to change the start-up password of the WAC 4. It is recommended that you change the default password to one of your choice.

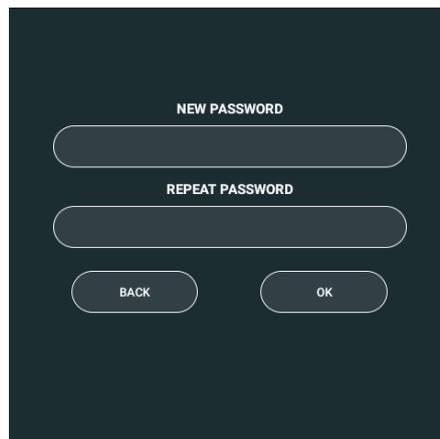


SETTING: Allows access to a multitude of device settings.

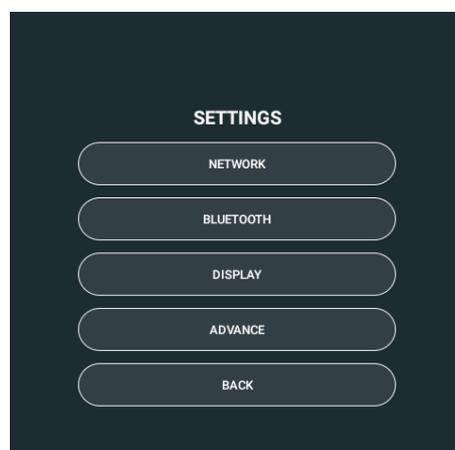


NETWORK: You can select the communication mode (Wifi, Ethernet, advanced and customised functions).

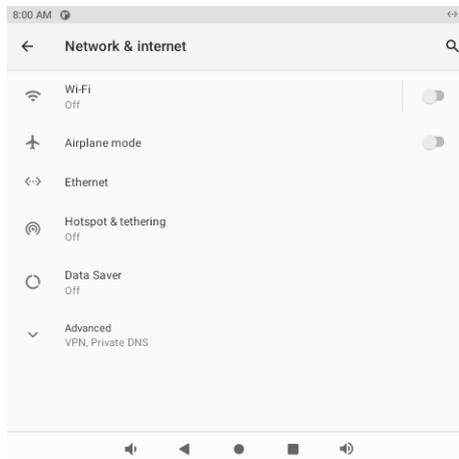


BLUETOOTH: Allows you to link a compatible device (smartphone, receivers, etc.).

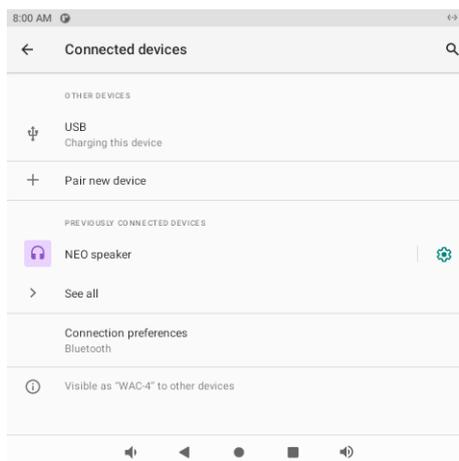

DISPLAY: The Autopower off time can be selected between 10s, 1m, or 10m. It is also possible to adjust the brightness of the display with the slider.

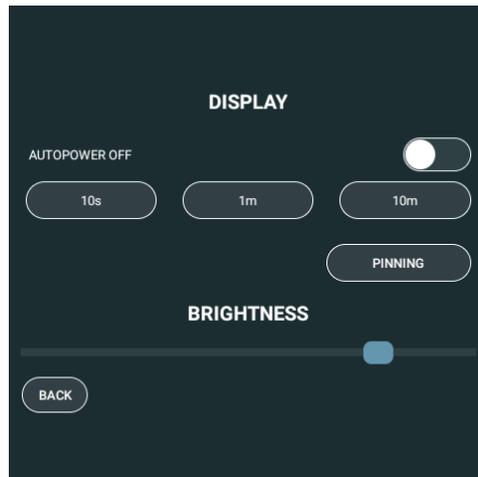

ADVANCE: We can access more specific settings related to the installed operating system (Android 11). For the purposes of normal operation of the device, there are no sections in this section that need to be modified.

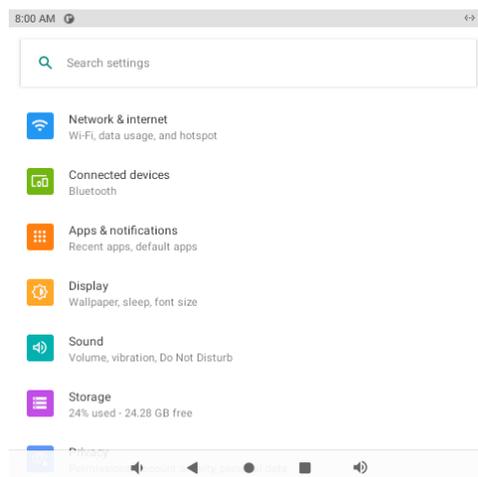

BACK: Press to return to the MENU screen.

Once the application to be launched has been selected and the network and communication parameters have been configured, it is time to run it. To do so, press EXIT.

The device will restart again, and after the welcome screen, and without pressing the icon, WAC 4 will launch the previously selected application.



EQUIPSON, S.A.

Avda. El Saler, 14 Pol. Ind. L'Alteró

46460- SILLA

Valencia – Spain

www.equipson.es support@equipson.es