



Datasheet / Ficha técnica

FT5023LS



F

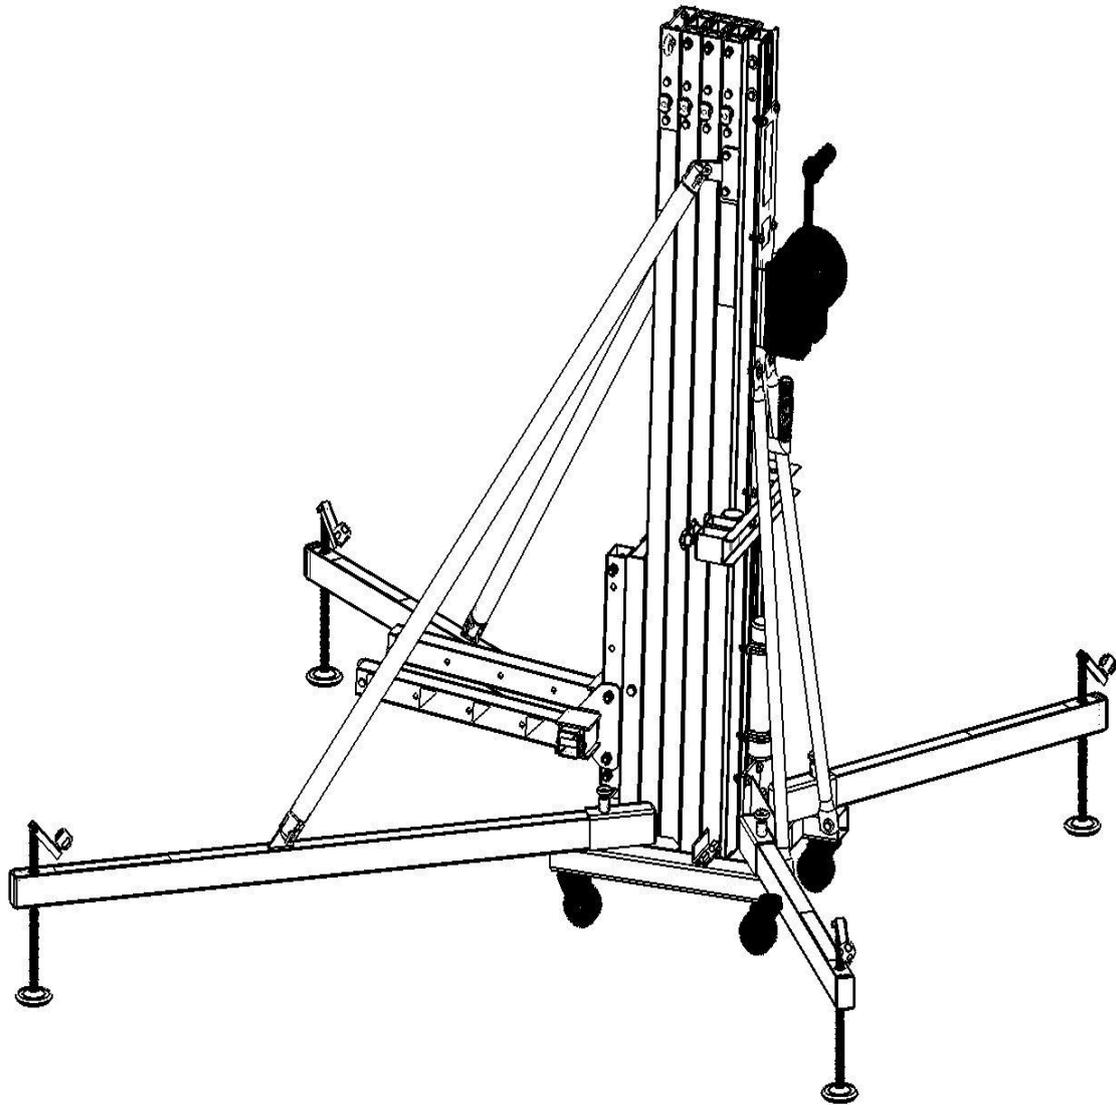

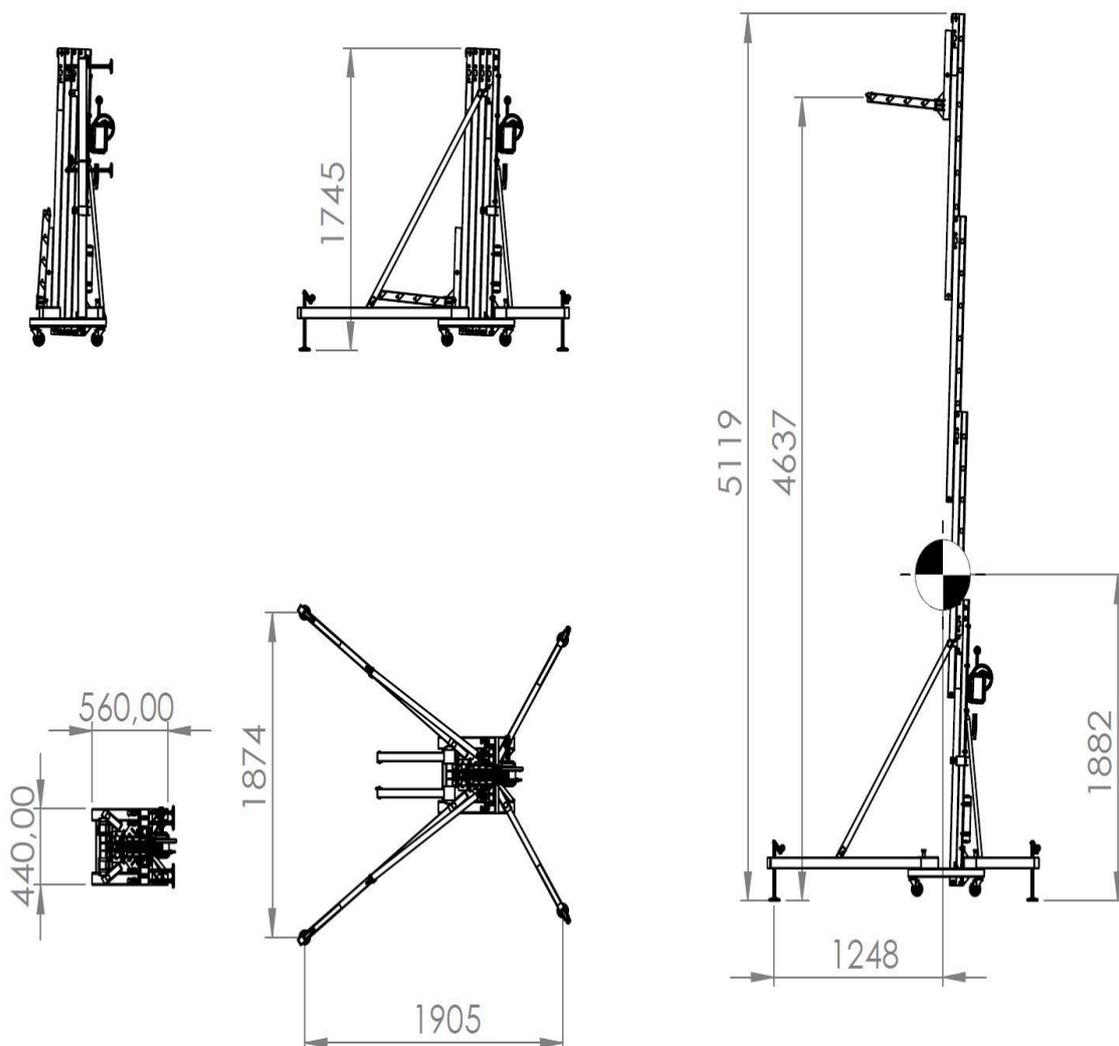

Technical data / Características técnicas	FT5023LS
Max. Load / Carga máx (mec.)	P1 - 235 kg P2 - 225 kg P3 - 215 kg P4 - 205 kg P1 - 518 lb P2 - 496 lb P3 - 474 lb P4 - 452 lb
Max. Load / Carga máx (struct.)	P1 - 455 kg P2 - 380 kg P3 - 350 kg P4 - 305 kg P1 - 1003 lb P2 - 838 lb P3 - 772 lb P4 - 672 lb
Peso / Weight	107 kg 236 lb
Folded base / Base plegada	0,62 x 0,47 m 2,03 x 1,54 ft
Folded height / Altura plegada	1,71 m 5,61 ft
Maximum height / Altura máxima	4,98 m 16,34 ft
Nº of profiles / Nº de tramos	4
Cable diameter / Diámetro cable	5 mm 0,2 in
Profile / Perfil	124 x 88 mm 4,88 x 3,46 in
Minimum load / Carga mínima	25 kg 55 lb
Material	Aluminio y Acero Aluminum and Steel
Alloy / Aleación	EN AW-6082 T6 S235JR
Colors / Colores	Negro mate Matte Black- RAL9005
Complies with / Cumple con	DGUV CE EN-17206

ACCESSORIES / ACCESORIOS



ATF1DS



ATF17PAM



ATF16PA

