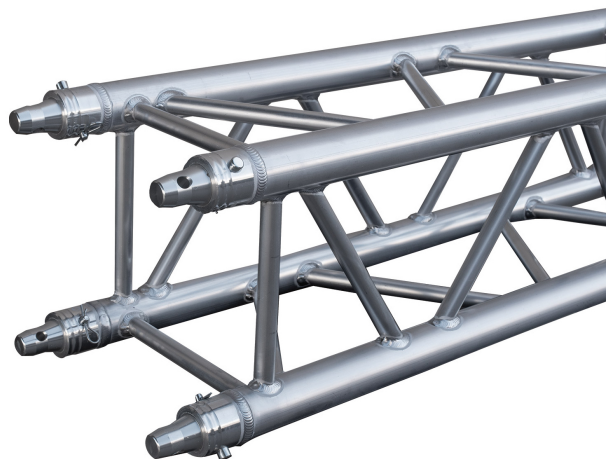




TRP RIGGING

WCX 29 SERIES



Tubo principal / Main Tube	50x2mm / 1,97x0,08 in
Tubo tirante / Brace Tube	20 X 2 mm / 0,79x0,08 in
Altura / Height	290 mm / 11,42 in
Anchura / Width	290 mm / 11,42 in
Acabado / Finish	Plata / Silver

TABLA DE CARGAS / LOAD TABLE

					
Longitud / Span		CPL (*)		UDL (**)	
m	kg	mm	kg/m	mm	
3	1002,3	8	440	7	
4	704,7	14	281,3	13	
5	649,4	22	258	18	
6	501,1	32	207,4	24	
7	420,7	45	133,3	36	
8	405,1	52	92,6	43	
9	309	59	63,6	49	
10	302,2	66	51,8	59	
11	235,5	68	42,3	68	
12	216,8	74	33,3	75	

(*) CPL: Carga puntual / Centre point load

(**) UDL: Carga distribuida / Symmetrical load

MEDIDAS / MEASURES

WCX 29 050	Longitud Estándar / Standard Length	290 x 290 x 500 mm / 11,42 x 11,42 x 19,7 in	5 kg
WCX 29 100	Longitud Estándar / Standard Length	290 x 290 x 1000 mm / 11,42 x 11,42 x 39,4 in	7,5 kg
WCX 29 200	Longitud Estándar / Standard Length	290 x 290 x 2000 mm / 11,42 x 11,42 x 78,75 in	12 kg
WCX 29 300	Longitud Estándar / Standard Length	290 x 290 x 3000 mm / 11,42 x 11,42 x 118,11 in	16 kg