MBD 415 A USB

User Manual / Instrucciones de Usuario

Rev 14.01.01

EN

MBD 415 A USB

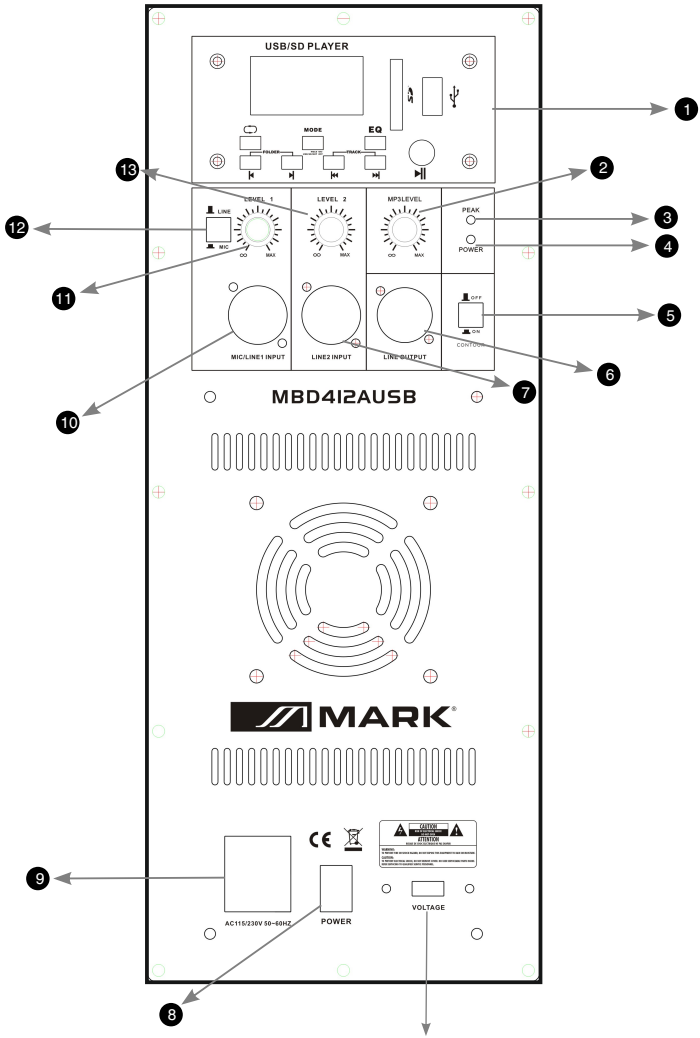

The AC inlet incorporates the voltage selector. Ensure that the main voltage source matches the voltage rating. Extract and place it according to the value. The cselected one will be showed in the correct reading position.



MBD 415 A USB

1-MP3 Player. It allos to load external MP3 files through USB/ SD card.

2-MP3 level. This is used to adjust the signal level of the USB/SD inputs.

3-Peak. It lights up when the applied signal reaches to distortion.

4-Power Led. It lights up when unit is ON.

5-Contour switch. Contour switch for increased EQ control.

6-Line Outou. XLR3 pin connector in order to send the pre-amplified. signal to another amplifier device

7-Line 2 Input. XLR3 pin connector for a balanced microphone input.

8-Power Switch. Press it to power on/off the device.

9-AC power. Connect the incorporated AC power cord.

10-MIC/Line Input 1. It allows to connect a MIC or a Line level Device.

11-Level 1. It is used to adjust the signal level of Input 1.

12-MIC/LINE Selector: It allows to select input source (MIC / LINE).

12-Level 2. It is used to adjust the signal level of Input 2.

Description: 15 ABS high power active speaker USB/SD

Freq Response 40Hz-20KHz

Max SPL: 110dB

Nominal Line Input: RCA, XLR, 3.5

Low Freq Woofer: 12" 2.5"VC 60oZ

High Freq Driver: 1.75"Ti.Diap.Driver 8Ω

Power Amplifier (Max): 600W

Weight: 22Kg

MBD 415 A USB

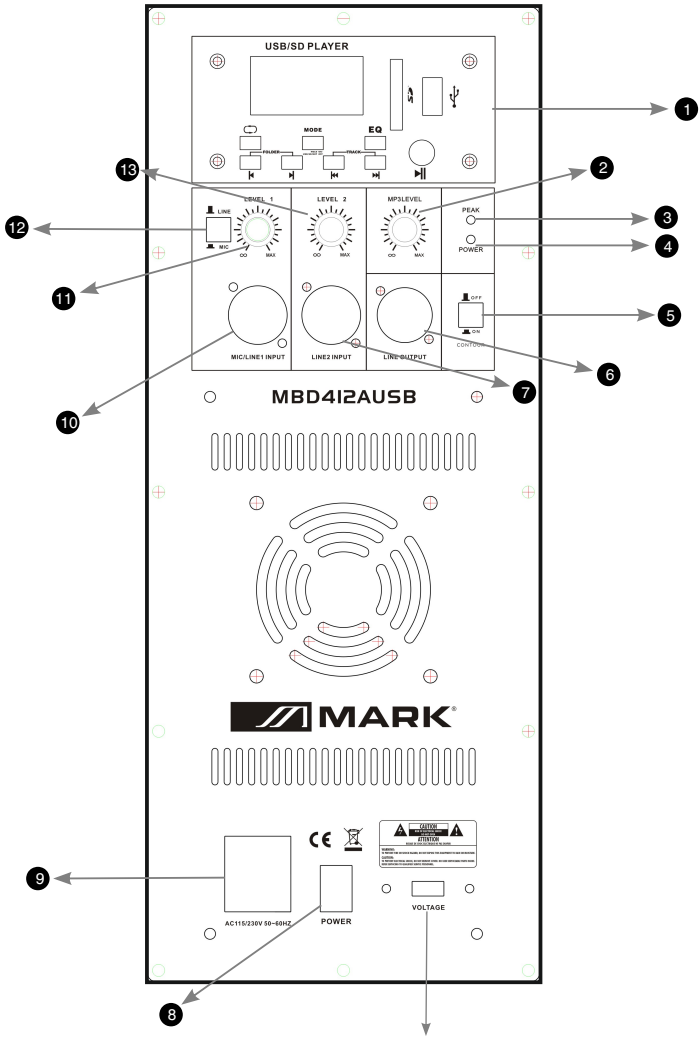

La entrada de alimentación eléctrica incorpora un selector de voltaje. Asegurese que el selector esta en la posición correcta respecto al voltaje suministrado.

MBD 415 A USB

1-MP3 Player. It allos to load external MP3 files through USB/ SD card.

2-MP3 level. This is used to adjust the signal level of the USB/SD inputs.

3-Peak. It lights up when the applied signal reaches to distortion.

4-Power Led. It lights up when unit is ON.

5-Contour switch. Contour switch for increased EQ control.

6-Line Outou. XLR3 pin connector in order to send the pre-amplified. signal to another amplifier device

7-Line 2 Input. XLR3 pin connector for a balanced microphone input.

8-Power Switch. Press it to power on/off the device.

9-AC power. Connect the incorporated AC power cord.

10-MIC/Line Input 1. It allows to connect a MIC or a Line level Device.

11-Level 1. It is used to adjust the signal level of Input 1.

12-MIC/LINE Selector: It allows to select input source (MIC / LINE).

12-Level 2. It is used to adjust the signal level of Input 2.

Descripción: 15 ABS high power active speaker USB/SD

Respuesta en frecuencia: 40Hz-20KHz

Max SPL: 110dB

Entrada Linea : RCA, XLR, 3.5

Bajas Freq Woofer: 12" 2.5"VC 60oZ

Altas Freq Driver: 1.75"Ti.Diap.Driver 8Ω

Potencia Amplificador (Max): 600W

Peso: 22Kg

EQUIPSON, S.A.

Avda. El Saler, 14 - Pol. Ind. L´Alteró
46460 - Silla (Valencia) Spain
Tel. +34 96 121 63 01 Fax + 34 96 120 02 42
www.equipson.es / equipson@equipson.es