




SUPERMULTIPAR LED 108/3

36 X 3W LEDs (3 in 1)


User Manual/Manual de Uso

Ver. 2.0

Please read this manual carefully before operating the LED light.



● LED DISPLAY FUNCTIONS

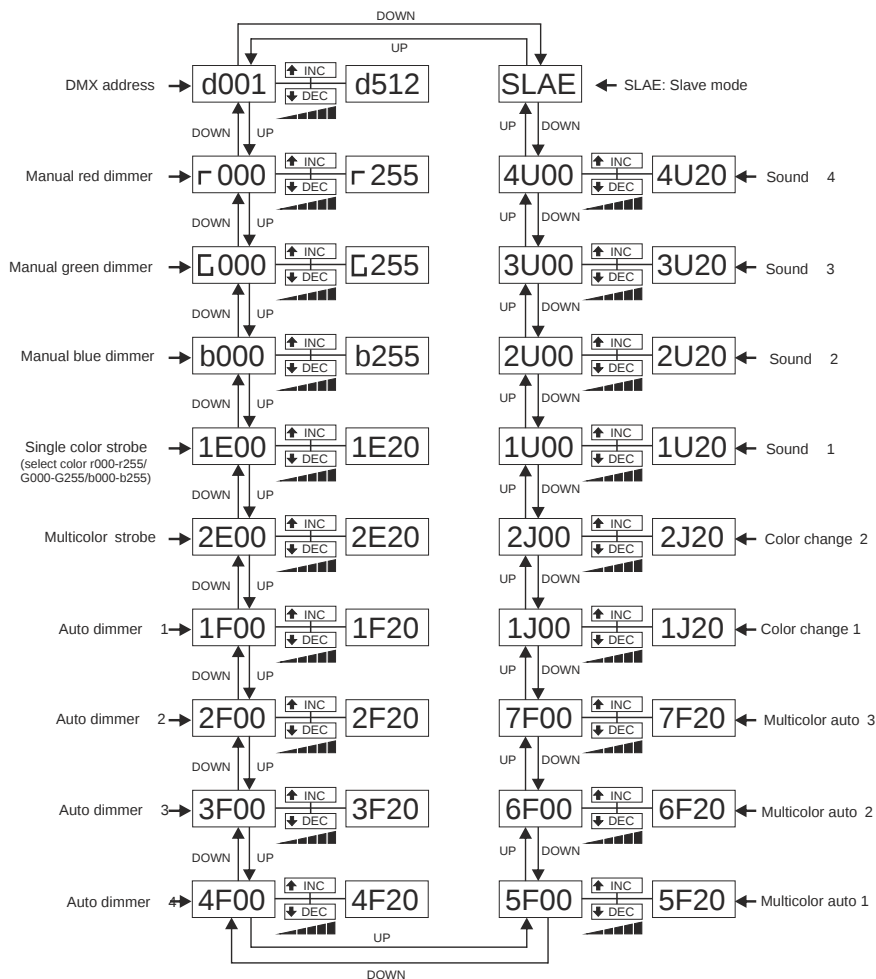

● DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	manual red dimmer 0-100%
2	0-255	manual green dimmer 0-100%
3	0-255	manual blue dimmer 0-100%
4	0-255	0-27 no function 28-55 single color strobe (CH 6 control the speed) 56-83 random strobe (CH 6 control the speed) 84-111 (RED) /112-139 (GREEN) 140-167 (BLUE) 168-195(AMBER) /196-223 (MAGENTA) 224-251 (CYAN) /252-255 (WHITE)
5	0-255	0 NO FUNCTION 1-12 RED PULSE 13-25 GREEN PULSE 26-38 BLUE PULSE 39-51 AMBER PULSE 52-64 MAGENTA PULSE 65-77 CYAN PULSE 78-90 WHITE PULSE 91-116 PULSE COLOR CHANGE 117-142 GRADUAL COLOR CHANGE 143-168 JUMP COLOR CHANGE 169-181 MACRO 1 /// 182-207 MACRO 2 208-220 SOUND 1 /// 221-233 SOUND 2 234-246 SOUND 3 /// 247-255 SOUND 4
6	0-255	Control the speed
7	0-255	General dimmer

● SPECIFICATIONS

Rate Voltage: AC100V-240V 50Hz-60Hz

Rate Power:120W


Lamp:Super bright, 3 in 1 LED Lamps

Quantity of Lamp: 36pcs (3W each)


N.W.:4.5kg



Por favor, lea este manual cuidadosamente antes de hacer funcionar este proyector LED.



● FUNCIONES DEL DISPLAY

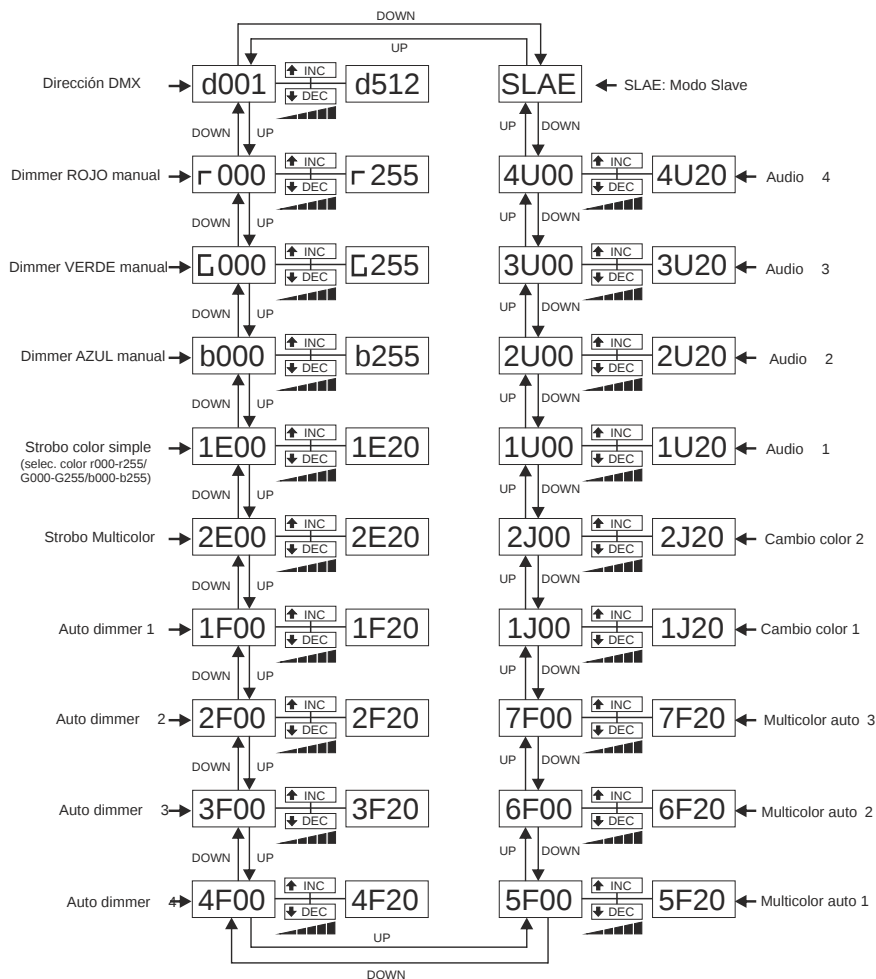

● VALORES DMX Y FUNCIONES

Canales	Valores	Functions
1	0-255	Dimmer rojo manual 0-100%
2	0-255	Dimmer verde manual 0-100%
3	0-255	Dimmer azul manual 0-100%
4	0-255	0-27 sin función 28-55 strob de color simple (CH 6 controla velocidad) 56-83 rstrobo random (CH 6 controla velocidad) 84-111 (ROJO) /112-139 (VERDE) 140-167 (AZUL) 168-195(AMBAR) /196-223 (MAGENTA) 224-251 (CYAN) /252-255 (BLANCO)
5	0-255	0 SIN FUNCIÓN 1-12 PULSO ROJO 13-25 PUYLSO VERDE 26-38 PUYLSO AZUL 39-51 PULSO AMBAR 52-64 PULSO MAGENTA 65-77 PULSO CYAN 78-90 PYLSO BLANCO 91-116 PULSO CAMBIO COLOR 117-142 CAMBIO COLOR GRADUAL 143-168 SALTO CAMBIO DE COLOR 169-181 MACRO 1 /// 182-207 MACRO 2 208-220 SOUND 1 /// 221-233 SOUND 2 234-246 SOUND 3 /// 247-255 SOUND 4
6	0-255	Controla la velocidad
7	0-255	Dimmer general

● ESPECIFICACIONES

Alimentación: AC100V-240V 50Hz-60Hz

Consumo: 120W

Color: RGB

LEDs: LEDs 3 en 1 superbrillantes

Cantidad de LEDs: 36 LEDs (3W cada uno)

Peso.: 4.5kg



EQUIPSON, S.A.

Avda. El Saler, 14 - Pol. Ind. L'Alteró
46460 - Silla (Valencia) Spain

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42
www.equipson.es / equipson@equipson.es