

Key Features

- 60W @ 8Ohm, 32W/16W/8W/4W @ (100 V line).
- 6.5" Coaxial speaker & 1" tweeter
- Cabinet built from water-resistant polypropylene.
- Hydrofobically-treated grille.
- Waterproof strain relief clamp.
- Cable with colour code for power tap selection.
- Wall brackets included.
- Sold in pairs
- Dimensions 170 x 290 x 200mm | 3.1kg. (per unit)



The NEO 6 MARINE consists of an installation loudspeaker with high IP range (IP65 for indoor and outdoor). Its special treatment (enclosure and paint), made it suitable for outdoor installations, specially, ships or places near beaches.

The model is sold in pairs. They are 2-way passive elements with 6.5" woofer and 1" tweeter. The low impedance connection of 8Ω and a transformer for 100V line with 4 different output power positions. In this way, the power at low impedance covers 60W and for 100V line, from 4W to 32W. Made of polypropylene, they include wall fixing brackets and are available in white color.

Applications

 Cruise Ships
 Restaurants

 Hospitality
 Gardens & Parks

 Outdoor venues
 Sports Venues

 Retail & Commerce
 Education


Technical Specifications

| | | | |
|-----------------------------|---|-----------------------------------|---------------------------|
| Type | Outdoor Loudspeaker | | |
| Transducers | 1x 6.5" woofer + 1" tweeter | | |
| Power Handling | LOW IMPEDANCE 8Ω 60W | 100V line 32W/16W/8W/4W | |
| Inputs | Cable with colour code conductors (Waterproof protected) | | |
| Frequency Range | 80Hz-20kHz (-10 dB) | | |
| Sensitivity | 92dB | | |
| SPL max | 109dB | | |
| Dispersion | 120° x 90° (-10dB) | | |
| Cabinet construction | Water-resistant polypropylene enclosure Hydrophobically-treated grille | | IP rating IP 65 |
| Mounting | U bracket | | |
| Dimensions | Size (W x H x D) 200 x 290 x 170mm | | |
| Net Weight | 3.1kg | | |
| Finish | Texture coating and white colour | | |




Rear Panel (View)



Rear Panel (connection colour code)

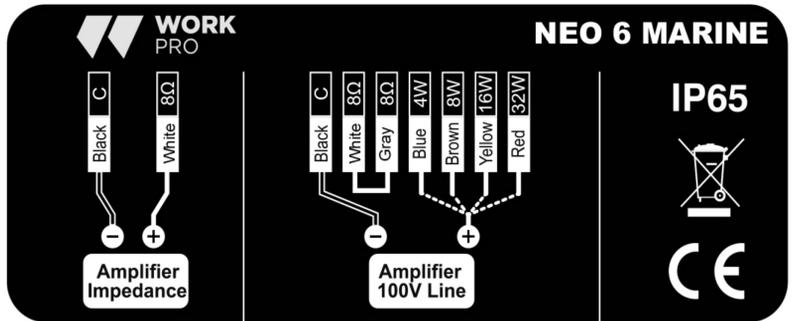

Dimensions in mm.

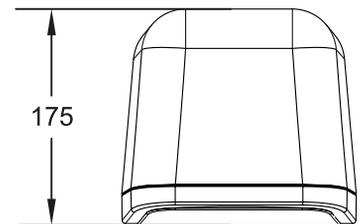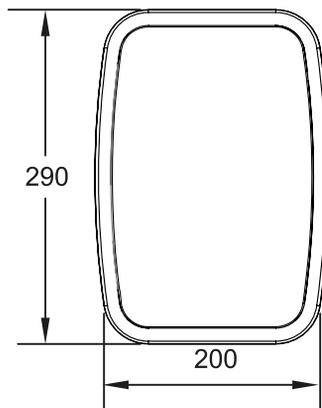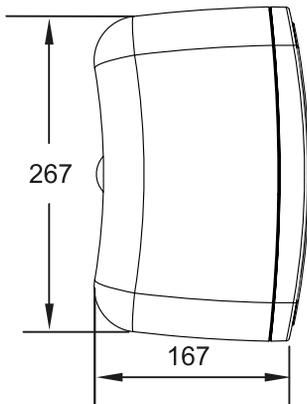

Shipping & Ordering







| | | | |
|-------------------|------------------------|--|-----------------------------|
| Packaging | Cardboard box (Unit) | | |
| Dimensions | Weight 7.4kg | Size (H x W x D) 370 x 420 x 240mm | Volume 0.0372 CBM |

References


#50EBS145 NEO 6 MARINE

Polar Pattern (Horizontal)

Polar Pattern (Vertical)

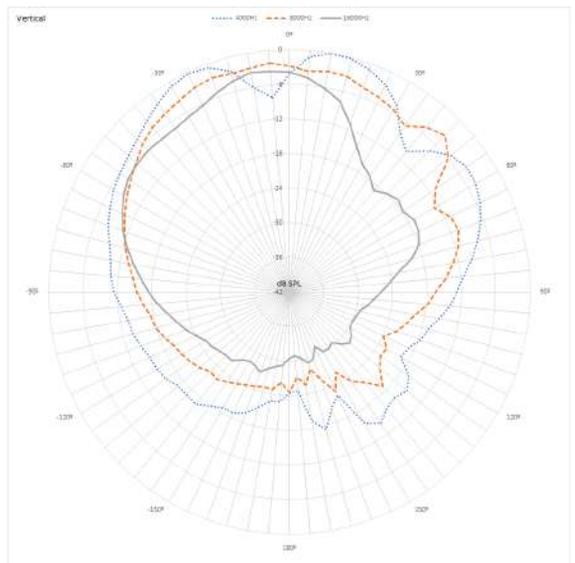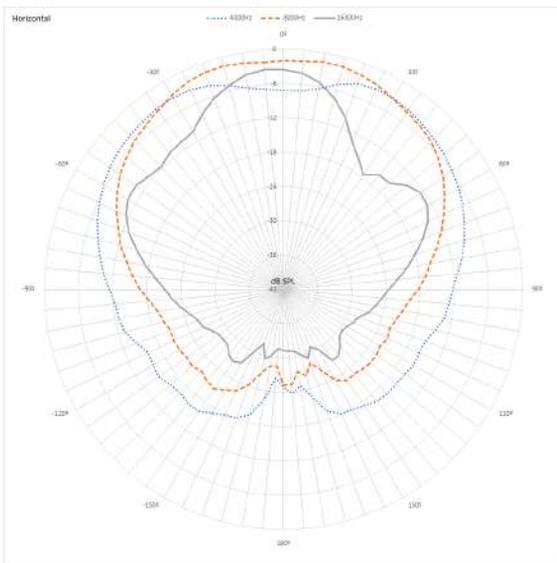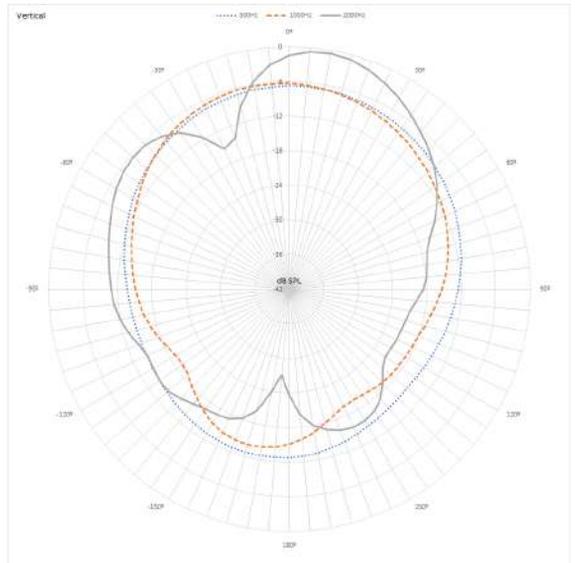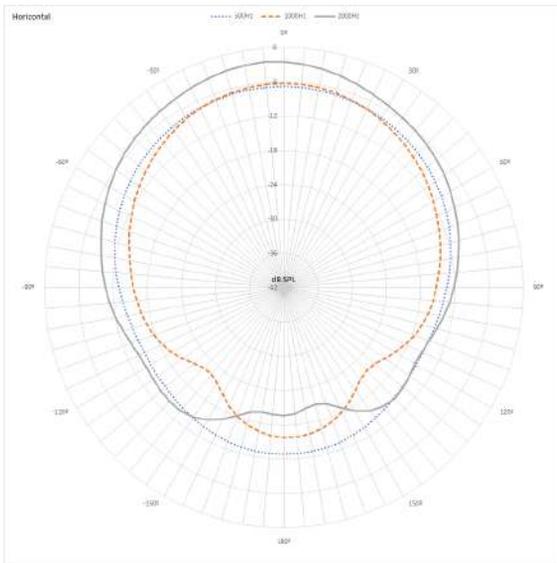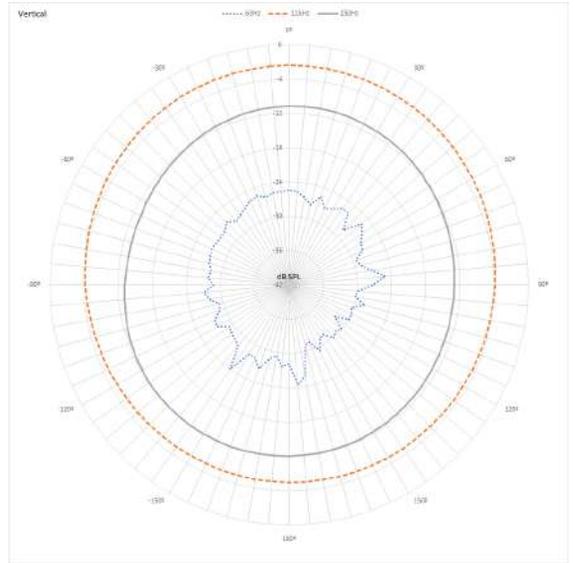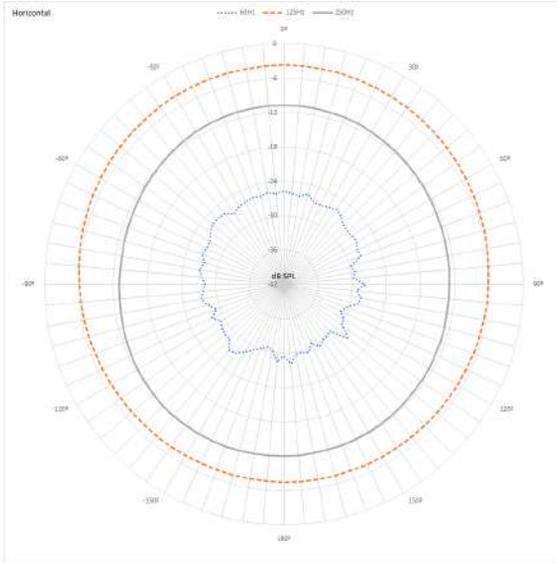

Response curve (SPL/Impedance vs. Frequency)

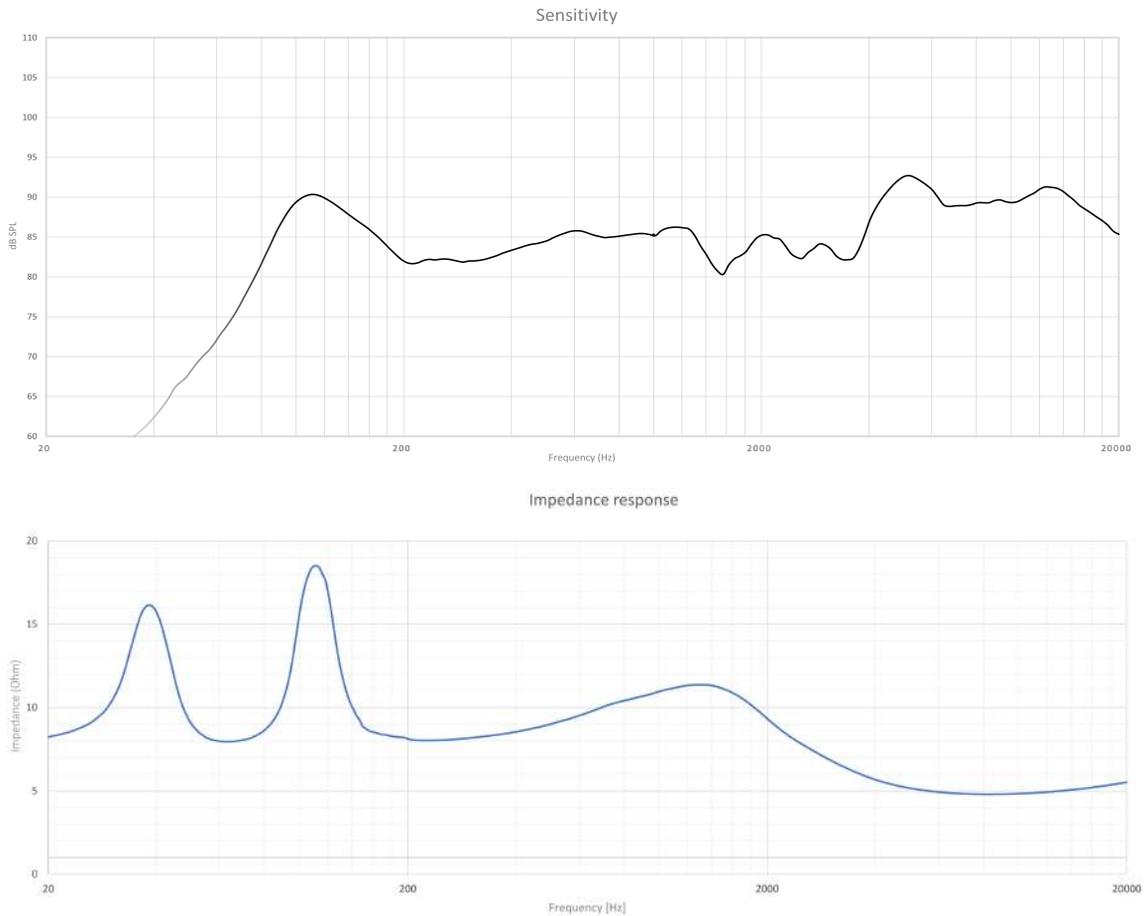

Support & Technical Request

All products features are subject to variations due to production tolerances.

We reserve the right to change specifications or improvements in the design or manufacturing that may affect these product specifications without notice, as a part of our policy to continually improve our products.

For technical queries, please contact with your supplier, reseller, distributor or visit our website www.workpro.es



Copyright

Technical specifications and availability subject to change without notice.

WORKPRO® reserve all rights in this document and in the subject thereof. By acceptance of the document the recipient acknowledges these rights and undertakes not to publish the document nor the subject thereof in full or in part, nor to make them available to any third party without our prior express written authorization, nor to use it for any purpose other than for which it was delivered to him.

Version 1.0

EQUIPSON S.A. Av. del Saler, 14. Pol. Ind. L'Alteró, Silla 46460 Valencia - Spain. Tel: +34 961216301 equipson@equipson.es