



GOLF-2.1

User Manual / Instrucciones de Usuario

GOLF 2.1

800 W PORTABLE AUDIO SYSTEM


SISTEMA DE AUDIO PORTATIL 800 W

English Version

Page 1

Versión Español

Página 5



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

NO WARRANTY AFTER OPENING



No opening on speaker frame or repairing the components inside the speaker. We always recommend you to hire professional to do the speaker connection and repair.



Este símbolo en su equipo o embalaje, indica que el presente producto no puede ser tratado como residuos domésticos normales, sino que deben entregarse en el correspondiente punto de recogida de equipos electrónicos y eléctricos. Asegurándose de que este producto es desechado correctamente, Ud. está ayudando a prevenir las consecuencias negativas para el medio ambiente y la salud humana que podrían derivarse de la incorrecta manipulación de este producto. EL reciclaje de materiales ayuda a conservar las reservas naturales. Para recibir más información, sobre el reciclaje de este producto, contacte con su ayuntamiento, su punto de recogida más cercano o el distribuidor donde adquirió el producto.

GARANTIA ANULADA AL ABRIR LA UNIDAD



No abra el marco de la caja acústica o trate de repararlo usted mismo, acuda a un técnico autorizado para su reparación

INTRODUCTION OF GOLF 2.1

GOLF 2.1 is a small portable performance system with three speakers and one set accessory. The sound is very good, small dimension, light weight, convenient transit and other features. The combination is like below.

1. 12 “ active subwoofer with three way amplifier, subwoofer is 500W, the other two way is 150W/ channel for the connection of two full range speaker, amplifier has the filter and EQ founction.
2. 6.5 “ full range plastic speaker, the power is 150W, the performance is very good wording with 12 subwoofer.
3. ACCESSORY: two speaker cables, two speaker stands with adjustable height, one travel bag with wheel, it is very convenient to use and transit

CONNECTING OF GOLF 2.1

1. After connecting, please assure that all the power supply is ON except for the system, then open the power supply of system
2. The support hole was built in the speaker, just put the speaker on the speaker stand and adjust the hight according to your use requirement.
3. Connect the L/R channel with the attached cable, please note the connection of NL4, after insertion, turn the pulg clockwise and lock the safty nut.
4. Connect J3P with the L/R and connect the other equipments with 6.35 plug, such as the mixer.

ACCESSORIES:

WPL- μ (high intensity engineering plastic cabinet)	2pcs
GOLF-2.1(high intensity engineering plastic cabinet)	1pcs
Bag	1pcs
Speaker Stand	2pcs
Speaker Cable	2pcs(2.5m/8m)
Signal cable	2pcs
Output power	500W/4Ohm+2x150W/8Ohm(amplifier module)
SPL(full range)	121dB(Max.)
Packing dimensions(W*D*H)	1030*480*465mm(1 Set)
Weight	50Kg(1Set)







WPL 1 SUB

FEATURES:

- Active low frequency speaker with one 12" woofer.
- Cabinet is made from polypropylene and special high-tech material in large injection mold . It's durable, anti-shock and has good damping characters.
- Voice coil in the 12" woofer is made from Ø 75mm copper cladding aluminium ribbon wire. Its efficiency is 20% higher than normal round wires.
- Heavy duty protective grille.

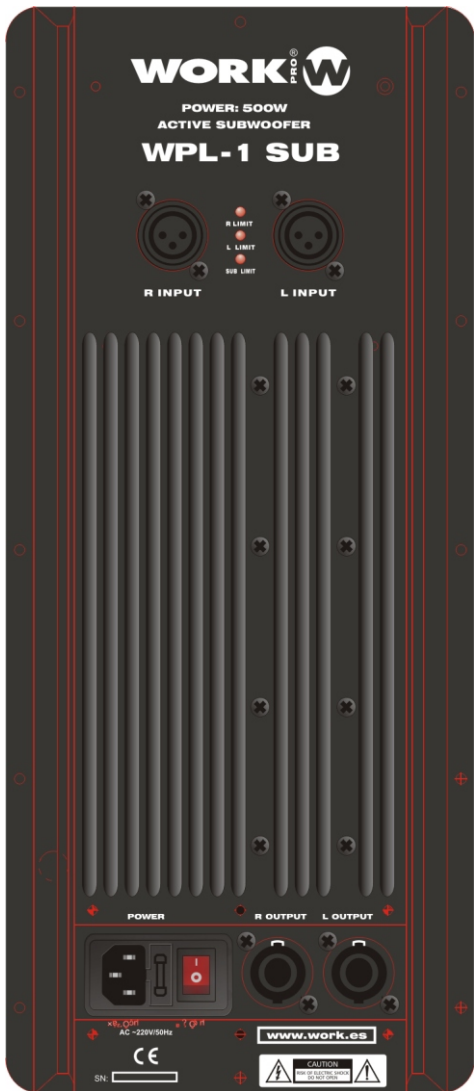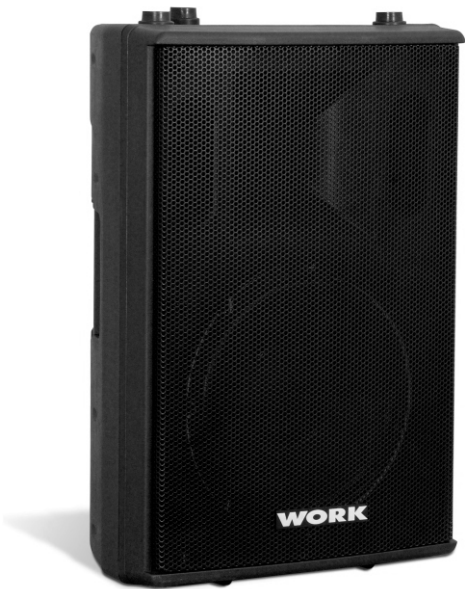

TECHNICAL PARAMETERS

System:	Three channel active speaker
Cabinet material:	Polypropylene, Trapezoid
Cabinet Colors:	Black
Drive Quantity:	1x12 "(Bass)
Low Frequeney Amplifier:	500W/4 Ω
Max Sound Level(dB/1M):	120dB
L/R Output Power(Without Limit):	150W/8 Ω
L/R Output Power(Limit):	110W/8 Ω
Distortion:	0.5%
Input Impedance:	20 KOhm
Input Connectors:	XLR K3P
Output Connectors:	NL4
Power Supply:	AC 220V/50Hz
Dimensions(WxDxH mm/pcs):	485x460 x700 mm
Net Weight(Kg/pcs):	28.5Kg

FEATURES:

- Two-way passive speaker with one 6.5" woofer and one 1" driver.
- Cabinet is made from polypropylene and special high-tech material in large injection mold. It's durable, anti-shock and has good damping characters.
- Voice coil in the 6.5" woofer is made from $\varnothing$ 50mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- The high frequency driver is protected by special design circuit to avoid being damaged when overload.
- Rotatable 90 ° 60 (HxV) dispersion horn makes it suitable for any performance purposes.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.




TECHNICAL PARAMETERS

System:	Built-in Crossover Two Way Full Range Speaker	
Driver Quantity:	6.5" x1(Bass)	1x $\varnothing$ 25mm Driver

Frequency Response(-3dB):	80Hz-18KHz
Frequency Response(-10dB):	65Hz-20KHz
Sensitivity(dB/1M/1W):	91 dB

Impedance:	8 Ohm
Recommendatory Power(RMS/W):	80 W
Max Sound Level(dB/1M):	110dB
Tweeter Dispersion(HxV):	90°60°

Harmonic Distortion:	$\leq$ 1%
Connectors:	1xNL4
Dimensions(WxDxH mm/pcs):	225X211 X325 mm
Net Weight(Kg/pcs):	5.6Kg

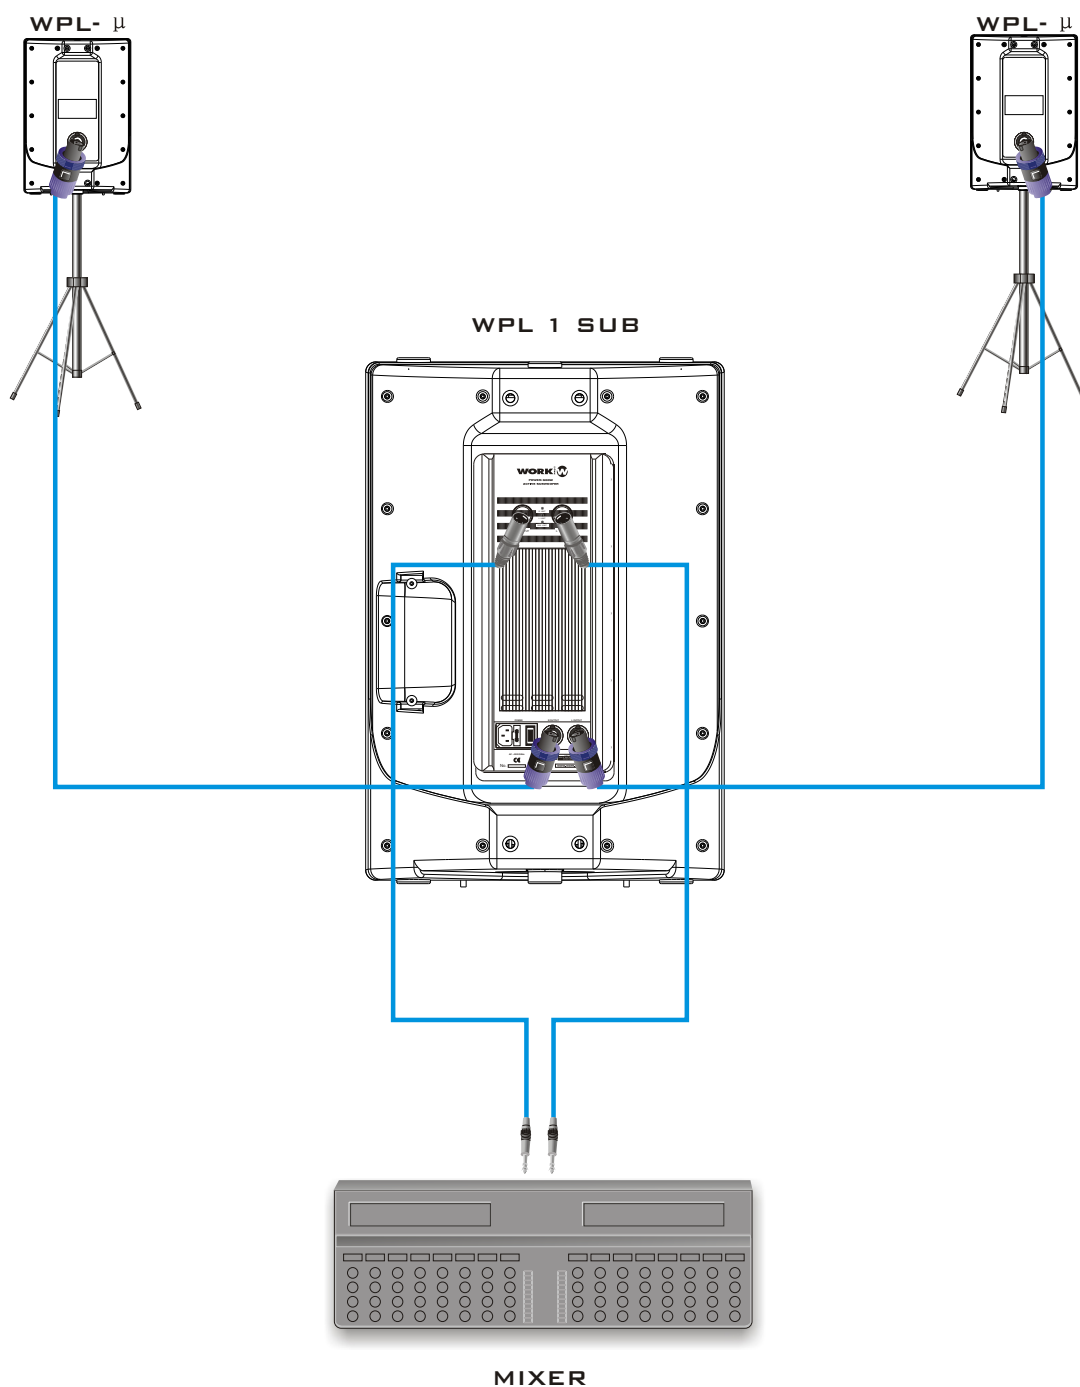

INTRODUCCION A GOLF 2.1

GOLF 2.1 es un sistema portátil de reducidas dimensiones que consiste en 3 cajas acústicas y un set de accesorios. La calidad del sonido, su pequeño tamaño y ligereza junto a la facilidad de transporte son algunas de sus principales características.

El sistema incorpora:

1. Subwoofer activo con altavoz de 12" con 3 salidas amplificadas: 500W para subwoofer y dos salidas de 150 W cada una para la conexión de las cajas full range de dos vías. El amplificador dispone de filtro y función de ecualizador.
2. Cajas acústicas full range de dos vías (2 unidades) capaces de soportar 150 W cada una. Funcionan de manera combinada con el subwoofer de 12".
3. ACCESORIOS: 2 cables de altavoz, 2 soportes de altavoz con altura ajustable, una bolsa de transporte con ruedas.

CONEXIONES DE GOLF 2.1

1. Para el conexionado a red, encienda en último lugar el amplificador del sistema
2. Las cajas pasivas disponen agujero de inserción en la parte inferior, inserte las cajas en el soporte y ajuste la altura de acuerdo a sus necesidades.
3. Conecte los cables L/R de canal con el cable suministrado, para el conexionado con los conectores NL4, después de insertarlos, gire en sentido horario para bloquearlos.
4. Conecte los cables de señal de entrada a la adecuada toma de un mezclador.

ACCESORIOS:

WPL- μ (Caja acústica de plástico inyectado)	2 pzas.
GOLF-2.1(caja acústica de plástico inyectado)	1 pza.
Bolsa	1 pza.
Soportes de altavoz	2 pzas.
Cables de Altavoz	2 pzas. (2.5m/8m)
Cable de señal	2 pzas



Potencia de salida	500W/4Ohm+2x150W/8Ohm(módulo amplif.)
--------------------	---------------------------------------

SPL(full range)	121dB(Max.)
Dimensiones embalado (An*Pr*Al)	1030*480*465mm(1 Set)
Peso	50Kg(1Set)



CARACTERISTICAS:

- Bafle activo para baja frecuenciai con un woofer de 12".
- Recinto acústico fabrica en polipropileno inyectado de alta calidad.
- La bobina del altavoz de 12" fabricada en cobre de 75 mm Ø y reborde de aluminio. Su eficacia es un 20% superior a los cables standard.
- Rejilla de protección de gran resistencia

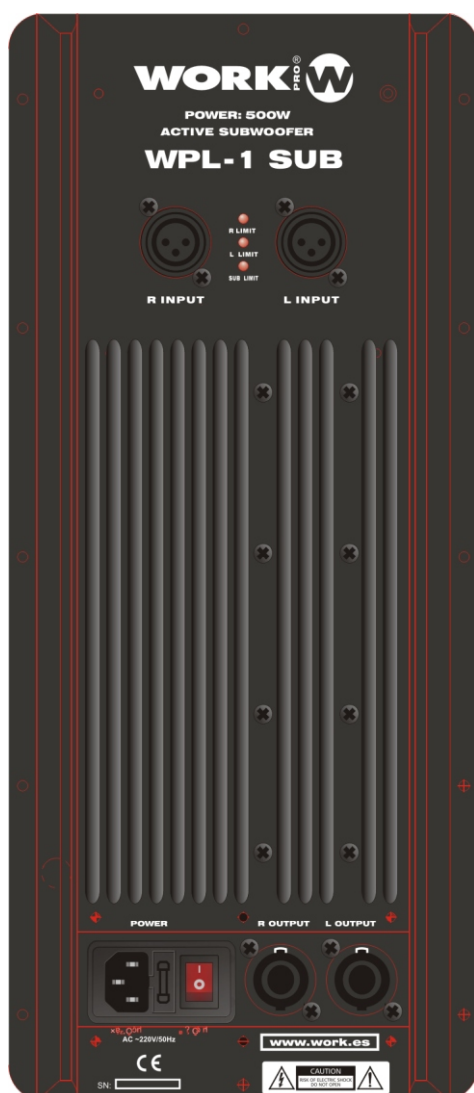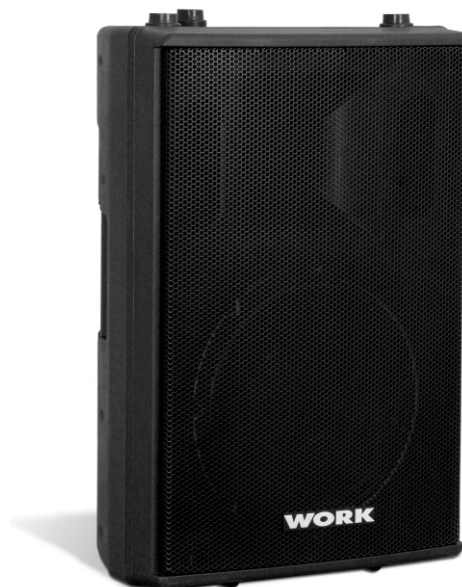

PARAMETROS TECNICOS

Sistema:	Sistema activo de 3 canales
Material de fabricación:	Polypropileno, Trapezoidal
Cabinet Color:	Negro
Drivers:	1x12 "(Bass)
Amplificador de Baja Frecuencia:	500W/4 Ω
Maximo Nivel (dB/1M):	120dB
Potencia de salida L/R Output (Sin Limitador):	150W/8 Ω
Potencia de salida L/R :	110W/8 Ω
Distorsión:	0.5%
Impedancia de entrada:	20 KOhm
Conectores de Entrada:	XLR 3 pin
Conectores de salida:	NL4
Alimentación:	AC 220V/50Hz
Dimensiones(AnxPrxAl mm):	485x460 x700 mm
Peso Neto(Kg):	28.5Kg

CARACTERISTICAS:

- Baffle pasivo de dos vías con altavoz de 6.5" y driver de 1".
- La bobina del altavoz de 6.5" fabricada en cobre de 50 mm Ø y reborde de aluminio. Su eficacia es un 20% superior a los cables standard.
- Recinto acústico fabrica en polipropileno inyectado de alta calidad.
- Rejilla de protección de gran resistencia
- El driver para alta frecuencia está protegido por un circuito especialmente diseñado para evitar daños de sobrecarga
- Dispersión de 90°x60° (HxV) que lo hacen ideal para multitud de configuraciones
- Posibilidad de configuración Array de hasta 4 filas y 8 columnas




PARAMETROS TECNICOS


Sistema:	Baffle Full Range de dos vías con Crossover incorporado	
Drivers:	6.5 "x1(Bass)	1x Ø25mm

Respuesta de frecuencia(-3dB):	80Hz-18KHz
Respuesta de frecuencia(-10dB):	65Hz-20KHz
Sensibilidad(dB/1M/1W):	91 dB

Impedancia:	8 Ohm
Potencia (RMS/W):	80 W
Máximo nivel (dB/1M):	110dB
Dispersión del Tweeter (HxV):	90°x60 °

Distorsión Armónica:	≤ 1%
Conectores:	1xNL4
Dimensiones(AnxPrxAl mm):	225X211 X325 mm
Peso neto(Kg):	5.6Kg

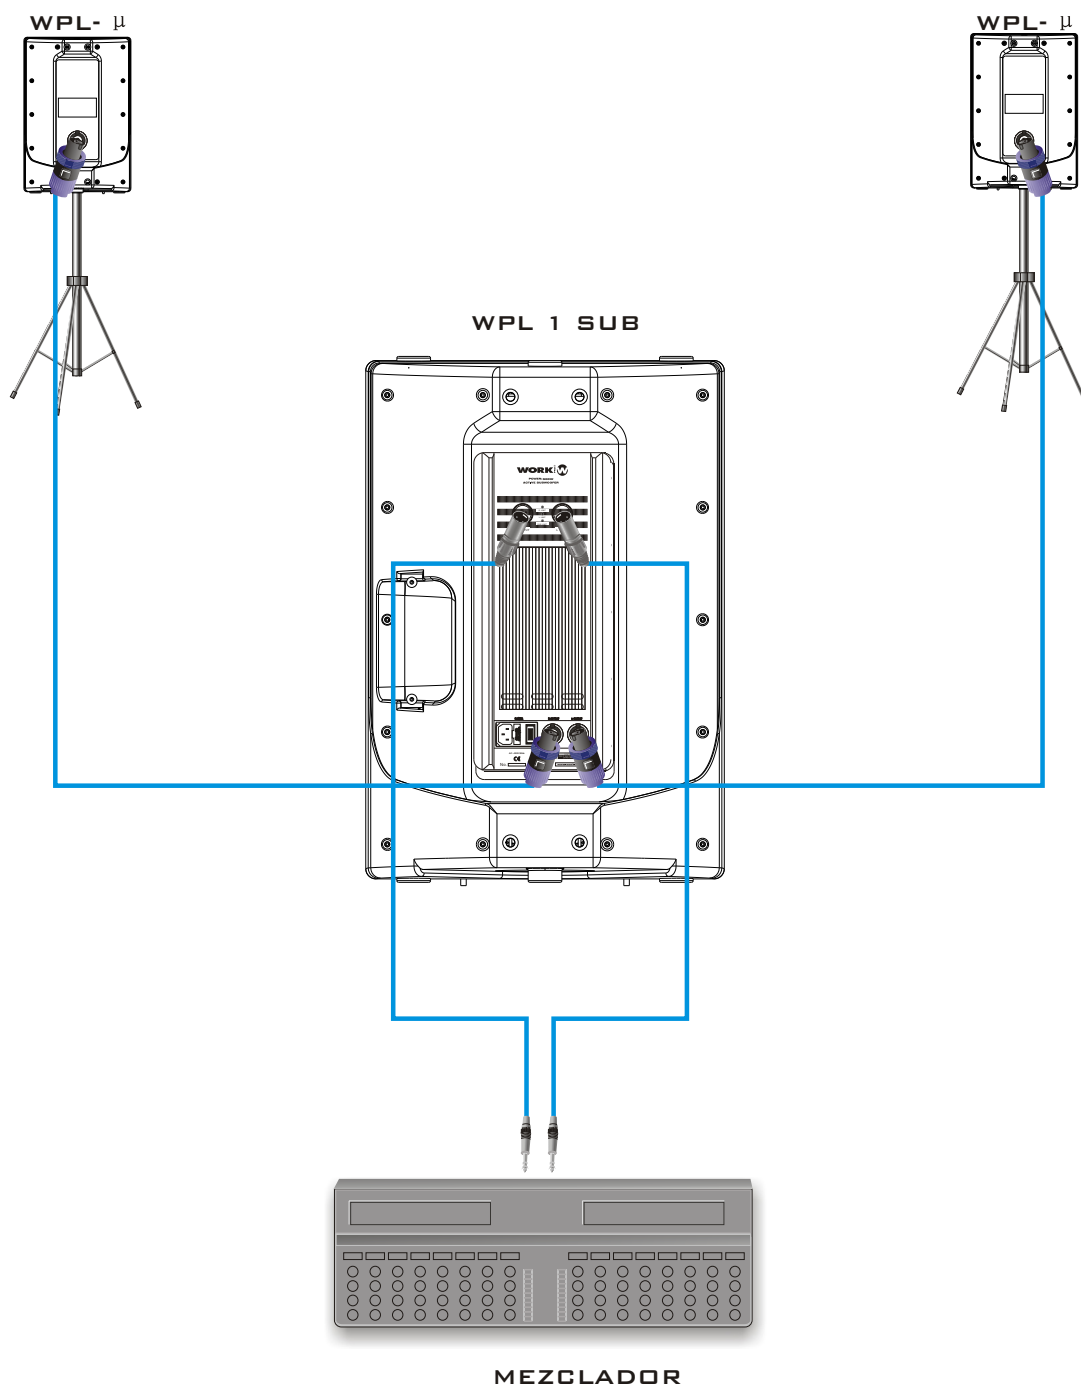

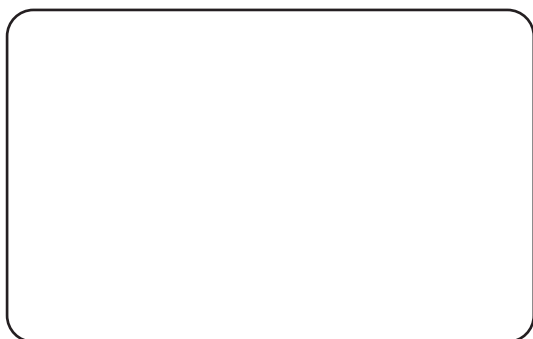

Equipson, S.A.
www.equipson.es
support@equipson.es



WORK[®]

All rights reserved.
